



FITTINGS DF SERIES

DEFLECTION EXPANSION FITTINGS



DF-100

 LISTED – File E22699

FEATURES-SPECIFICATIONS

Features

- Durable cast ZA12 (zinc alloy) end couplings for use with rigid or IMC conduit
- Stainless steel lap bands for superior corrosion resistance and to ensure fastened strength
- Silicone rubber sleeve for high UV and environmental corrosion resistance
- Tinned braided copper grounding straps for electrical continuity
- Raintight, watertight, and concrete-tight


Materials

Add suffixes to the following for ordering logic:

- ZA12 (zinc Alloy) standard
- Hot Dipped Galvanized DF-50EG
- Aluminum DF-50AL
- Polyolefin Coated DF-50GG



DEFLECTION EXPANSION FITTINGS

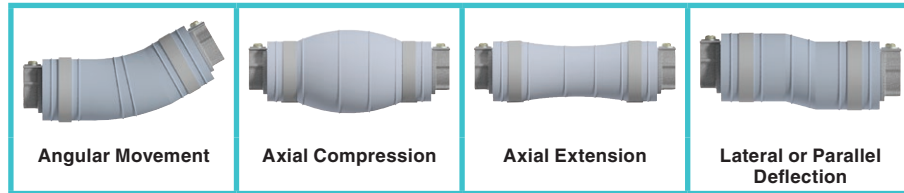

DEFLECTION DF			
HUB SIZE	CATALOG #	MAX. DIA. (A)	LENGTH (B)
1/2"	DF-50	2-1/4"	6-3/4"
3/4"	DF-75	2-1/2"	6-3/4"
1"	DF-100	2-3/4"	7"
1-1/4"	DF-125	3-1/8"	7-1/4"
1-1/2"	DF-150	3-1/8"	7-1/4"
2"	DF-200	3-7/8"	8-1/8"
2-1/2"	DF-250	4-3/8"	8-1/2"
3"	DF-300	5"	8-1/2"
3-1/2"	DF-350	5-3/4"	9-1/4"
4"	DF-400	6-1/4"	9-1/4"
5"	DF-500	7-1/4"	9-3/8"
6"	DF-600	8-1/4"	9-3/8"

