



Same mounts as the legacy
Killark VM Series for ease
of retrofitting



Type I Optic Pattern

Type III Optic pattern

Type V Optic Pattern


OPTIC PATTERN ▼



5000K – Noon Day Sun Light



Green – for Migratory Birds

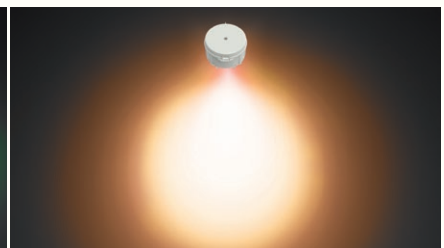

Amber – for Marine Life


▲ LED COLOR OPTIONS



LIGHTING VMLX SERIES

INTRODUCTION

CERTILITE®

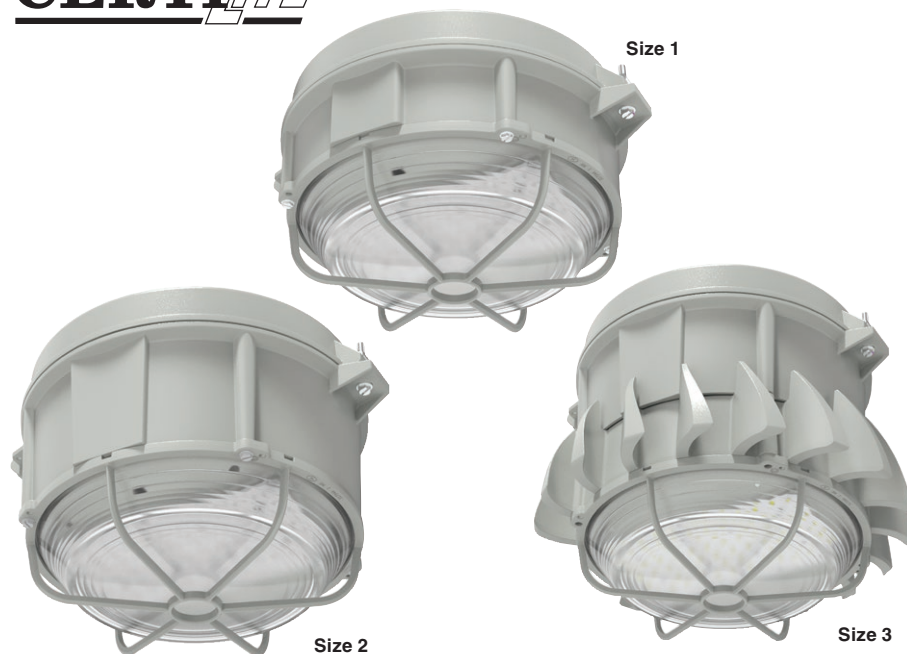

Class I, Div. 2, Groups A,B,C,D
Class I, Zone 2, Groups IIC, IIB, IIA
Class II, Div. 1 & 2, Groups E,F,G
Class III

Suitable for wet locations

Type 3, 4X

IP66

Marine Rated (US only)

IECEx Rated (Zone 2)

Ex ec IIC T4/T3 Gc

Ex tb IIIC T4/T3 Db

Ambient Suitability -40°C to 65°C
(see tables). -20°C to 50°C for
Emergency models



IECEx Certificate
QPS 15.0006



ATEX Certificate
QPS22ATEX7000

FEATURES-SPECIFICATIONS

Features

- Traditional Photometric Performance
- Refractor options for Type I, III, and V
- VML-X Housing can be retrofitted to existing VM splice boxes for easy installation
- Retro fit adapters for various manufacturers mounts
- LED Array Life – 100,000+ hours with 70% initial lumens
- Chromaticity outputs:
 - » 5000K 70CRI Cool CCT
 - » 3000K 95CRI Warm CCT
- Wildlife Friendly color options
 - » Amber – Helps protect marine wildlife
 - » PC Amber – Phosphate coated Amber
 - » Green – Helps protect migratory birds
- Surge Protection
- Globe and guard are supplied assembled to the tank
- Self-testing and Self-diagnostics on battery back up fixtures
- Terminal blocks fitted as standard
- Reduced Storage Footprint

Materials

- Housing, Splice box and Guards corrosion resistant copper-free aluminum alloy
- Baked Powder epoxy/polyester finish, electrostatically applied for complete, uniform corrosion protection
- All external hardware - stainless steel
- Reflectors – White Polycarbonate
- Standard Glass Globe
- Optional Polycarbonate Globe


Electrical Ratings

- 110 thru 250 VDC
- 120 thru 277 VAC, 50/60Hz
- 347 thru 480 VAC, 50/60Hz
- Surge Protection: 6KV/6KA surge protection as standard.
- Optional supplementary 20KA/10KV (120-277 VAC), 10KA/10KV (347-480 VAC) Surge Protection
- Battery Duration: 90mins 10W, 180 mins 5W
- Terminal Size: 12AWG /4mm (Loop In-Loop Out)



CATALOG LOGIC

The complete luminaire catalog number is as follows:

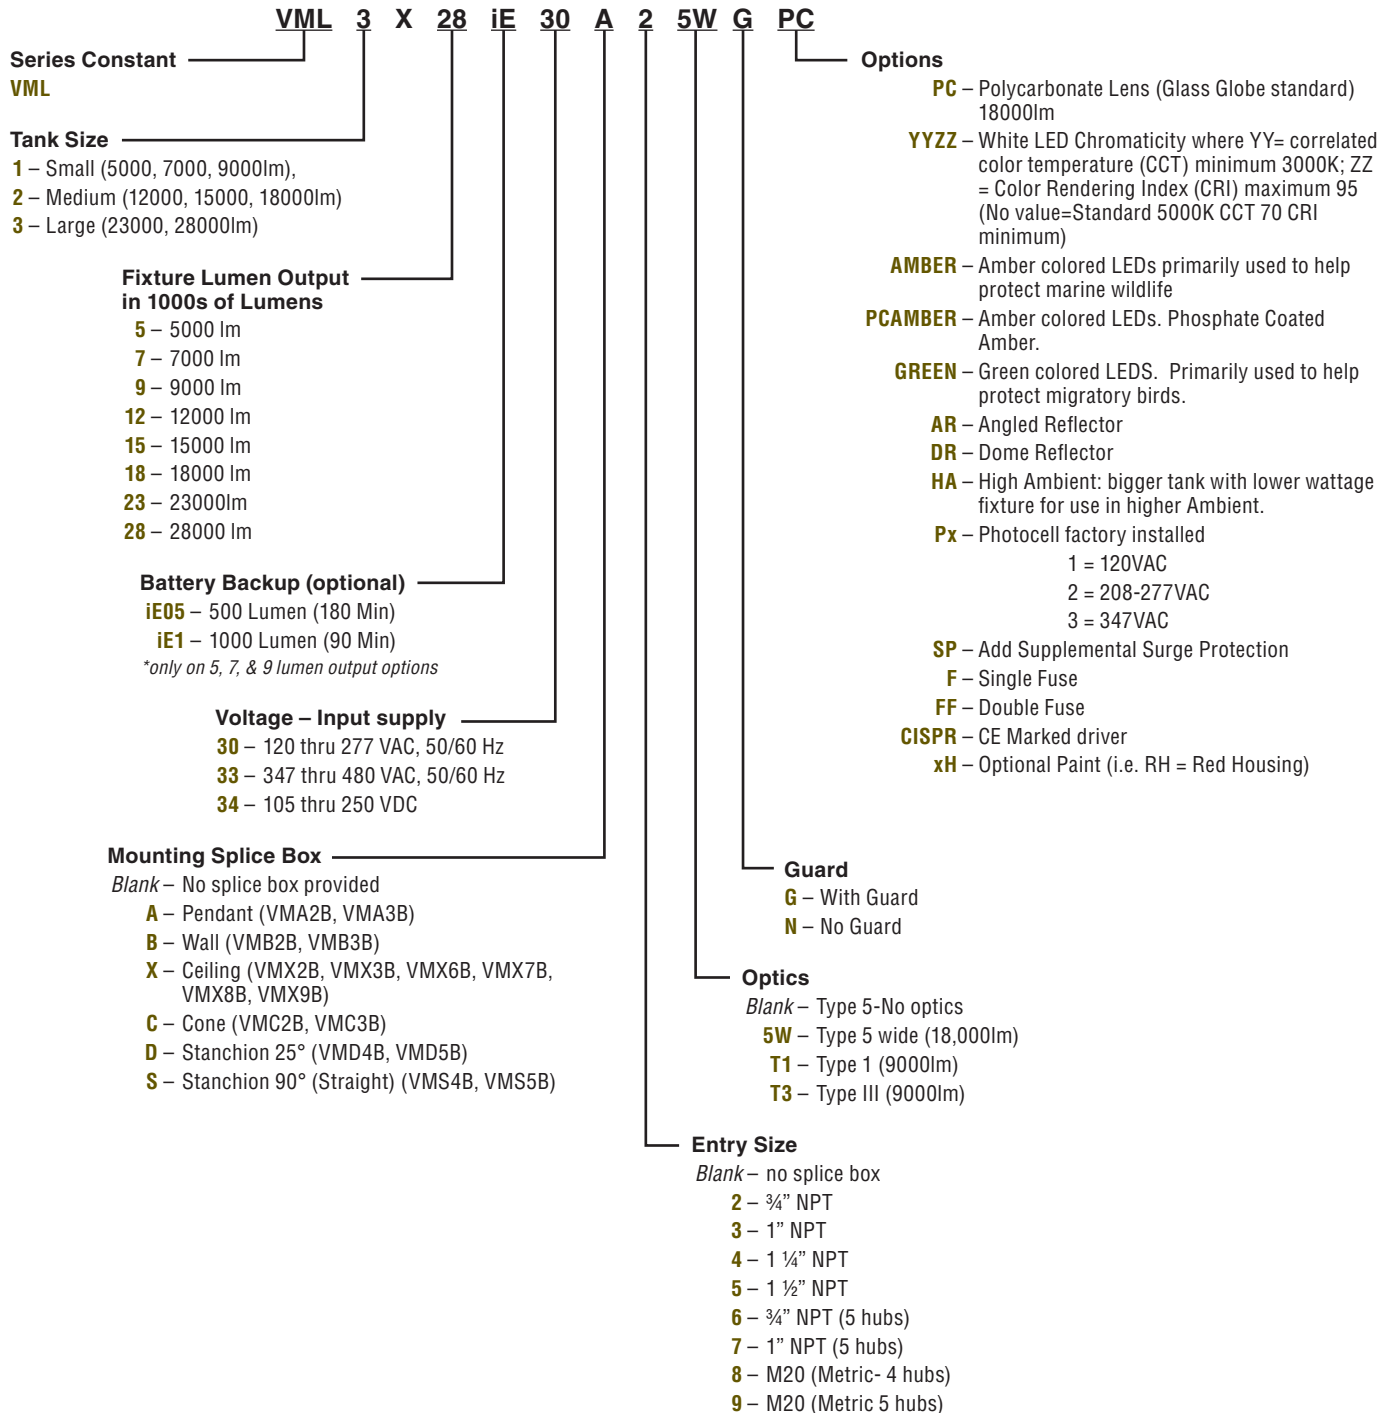



LIGHTING

VMLX SERIES

VML-X TEMPERATURES										
CATALOG NUMBER	WEIGHT	WATTAGE	VOLTAGE	AMPS	CLASS I, DIV. 2 GROUPS A,B,C & D; (ZONE 2, GROUPS IIC, IIB, IIA)2			CLASS II, DIV. 1		
					40°C (75°C WIRE)	55°C (90°C WIRE)	65°C (90°C WIRE)	40°C (75°C WIRE)	55°C (90°C WIRE)	65°C (90°C WIRE)
VML1X530	10.8	40	120-277 VAC	0.33-0.14	T4A	T4A	—	EFG	EFG	—
VML1X533			347-480 VAC	0.12-0.08						
VML1X534			120-250 VDC	0.33-0.16						
VML1X730	10.8	55	120-277 VAC	0.46-0.20	T4A	T4A	—	EFG	EFG	—
VML1X733			347-480 VAC	0.16-0.11						
VML1X734			120-250 VDC	0.46-0.22						
VML1X930	10.8	75	120-277 VAC	0.63-0.27	T4A	T4A	—	EFG	EFG	—
VML1X933			347-480 VAC	0.22-0.16						
VML1X934			120-250 VDC	0.36-0.30						
VML2X1230	13.4	100	120-277 VAC	0.83-0.36	T4	T4	—	EFG	EFG	—
VML2X1233			347-480 VAC	0.29-0.21						
VML2X1234			120-250 VDC	0.83-0.40						
VML2X1530	13.4	120	120-277 VAC	1.00-0.43	T4	T4	—	EFG	EFG	—
VML2X1533			347-480 VAC	0.35-0.25						
VML2X1534			120-250 VDC	1.00-0.48						
VML2X1830	13.4	140	120-277 VAC	1.17-0.51	T4	T4	—	EFG	EFG	—
VML2X1833			347-480 VAC	0.40-0.29						
VML2X1834			120-250 VDC	1.17-0.56						
VML3X2330	25.3	200	120-277 VAC	1.67-0.72	T3C	T4A	—	EFG	EFG	—
VML3X2333			347-480 VAC	0.58-0.42						
VML3X2334			120-250 VDC	1.67-0.80						
VML3X2830	25.3	250	120-277 VAC	2.08-0.90	T3C	T4A	—	EFG	EFG	—
VML3X2833			347-480 VAC	0.72-0.52						
VML3X2834			120-250 VDC	2.08-1.00						
VML2X530 HA	13.4	40	120-277 VAC	0.33-0.14	T4A	T4A	T4A	EFG	EFG	EFG
VML2X533 HA			347-480 VAC	0.12-0.08						
VML2X534 HA			120-250 VDC	0.33-0.16						
VML2X730 HA	13.4	55	120-277 VAC	0.46-0.20	T4A	T4A	T4A	EFG	EFG	EFG
VML2X733 HA			347-480 VAC	0.16-0.11						
VML2X734 HA			120-250 VDC	0.46-0.22						
VML2X930 HA	13.4	75	120-277 VAC	0.63-0.27	T4A	T4A	T4A	EFG	EFG	EFG
VML2X933 HA			347-480 VAC	0.22-0.16						
VML2X934 HA			120-250 VDC	.063-0.30						
VML3X1230 HA	25.3	100	120-277 VAC	0.83-0.36	T4A	T4A	T4A	EFG	EFG	EFG
VML3X1233 HA			347-480 VAC	0.29-0.21						
VML3X1234 HA			120-250 VDC	0.83-0.40						
VML3X1530 HA	25.3	120	120-277 VAC	1.00-0.43	T4A	T4A	T4A	EFG	EFG	EFG
VML3X1533 HA			347-480 VAC	0.35-0.25						
VML3X1534 HA			120-250 VDC	1.00-0.48						
VML3X1830 HA	25.3	140	120-277 VAC	1.17-0.51	T4A	T4A	T4A	EFG	EFG	EFG
VML3X1833 HA			347-480 VAC	0.40-0.29						
VML3X1834 HA			120-250 VDC	1.17-0.56						

DELIVERED LUMENS										
CATALOG NUMBER	GLASS GLOBE									POLYCARBONATE
	5000K 70CRI LEDS	TYPE 5 WIDE OPTIC	TYPE 3 OPTIC	TYPE 1 OPTIC	ANGLED REFLECTOR	DOME REFLECTOR	GREEN LED	AMBER LED	3000K 80CRI LEDS	CLEAR GLOBE
VML1X5(XX)(YY)	5295	5002	4803	4868	4560	4802	3694	—	4871	5353
VML1X7(XX)(YY)	7101	6708	6441	6528	6116	6440	4030	1890	6532	7179
VML1X9(XX)(YY)	9884	9338	8966	9087	8513	8964	4368	—	9093	9992
VML2X12(XX)(YY)	14046	13305	—	—	12049	12645	7005	2859	12922	14200
VML2X15(XX)(YY)	16359	15496	—	—	14033	14727	7642	—	15050	16538
VML2X18(XX)(YY)	18733	17745	—	—	16070	16865	—	—	17234	18939
VML3X23(XX)(YY)	23090	—	—	—	19807	20787	—	—	21242	—
VML3X28(XX)(YY)	28275	—	—	—	24424	25446	—	—	26013	—



ACCESSORIES





CERTILITE® VM MOUNTING SPLICE BOXES

HUB SIZE	CATALOG NUMBER							
	PENDANT	FLEXIBLE PENDANT	CEILING 4 HUB	CEILING 5 HUB	WALL	CONE TOP	25 DEGREE STANCHION	90 DEGREE STANCHION
3/4"	VMA2B	VMF2B	VMX2B	VMX6B	VMB2B	VMC2B	—	—
1"	VMA3B	VMF3B	VMX3B	VMX7B	VMB3B	VMC3B	—	—
1-1/4"	—	—	—	—	—	—	VMD4B	VMS4B
1-1/2"	—	—	—	—	—	—	VMD5B	VMS5B
M-20	—	—	VMX8B**	VMX9B	—	—	—	—

*VMEZA is used between a ballast tank and an EZ mount-ordered separately.

**VMX8B furnished with 3 non-metallic plugs.

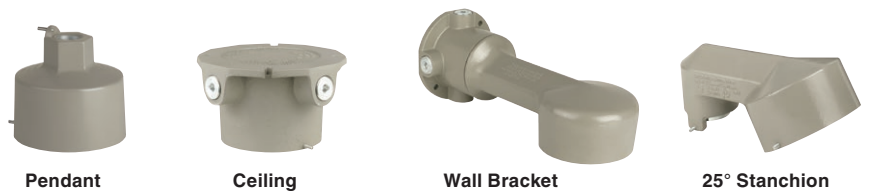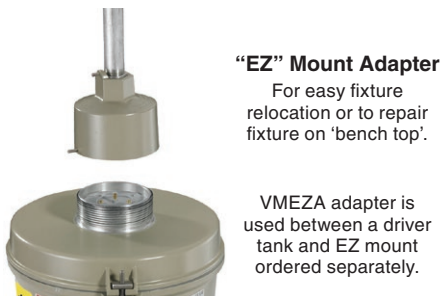

MOUNTING BOXES

CATALOG NUMBER				HUB SIZE
PENDANT	CEILING	BRACKET	STANCHION	
EZA2	EZX2	EZB3	—	3/4"
EZA3	EZX3	EZB3	—	1"
—	—	—	EZD4A	1-1/4" / 1/2"*

*1-1/2" furnished with 1-1/2"-1-1/4" reducer and extension.

Competitive Adapters

Designed to ease upgrading of other manufacturer's fixtures to KILLARK LEDs where removal of existing mounting screws and conduit would be difficult and time consuming.

ACCESSORIES

CATALOG NUMBER	DESCRIPTION
VMLXGL	Globe (glass)
VMLXPC	Globe (polycarbonate)
VMLXGRD	Guard
VMLXDR	Dome Reflector
VMLXAR	Angle Reflector
VMFSPC1	120VAC Photocell with FS Style Cover
VMFSPC2	208-277VAC Photocell with FS Style Cover
VMSC10	10ft Stainless Steel Safety Cable with loop grip
HUB2PC120	Field Installed 120VAC Photocell
HUB2PC227	Field Installed 208-277VAC Photocell
HUB2PC347	Field Installed 347VAC Photocell





LIGHTING

VMLX SERIES

HIGH WATTAGE SELF-TESTING BATTERY BACKUP



Optional self-testing
emergency battery backup


Electronics Includes:

- Self-diagnostics monitors LED status, LED driver circuit, battery capacity and charger function and displays any fault detection by means of a flashing code
- Self-Test feature automatically runs a 1 minute test once a month and an alternating 30-60 minute test once every 6 months. LED indicator provides visible fault detection and charging status
- User initiated 1, or 90-minute system test feature
- 15 minute re-transfer delay
- Automatic unit transfer in brown-out conditions (below 80% of nominal AC input voltage)
- 90 or 180 minute run time options.

TEST SWITCH INDICATOR STATUS


LED INDICATORS STATUS	EM DRIVER STATUS/MODE
Solid Green	System OK/AC OK (Self-diagnostic Enabled or Disabled).
Slow Flashing Red, 4s on/1s off	Battery not detected, check battery switch or connection.
Flashing Red, 1s on/1s off	Battery Failure, replace battery.
Flashing Green, 1s on/1s off	Self Diagnostic test underway.
Fast Flashing Red, 0.1s on/0.1s off	Abnormal driver performance, replace driver.
Very Slow Flashing Red, 4s on/4s off	Over temperature.
None. Both LEDs OFF	Normal working in EM mode.
Green/Red alternative flashing, 1s green/1s red	No load or output over voltage protection triggered.

LED Battery Backup Lighting Design

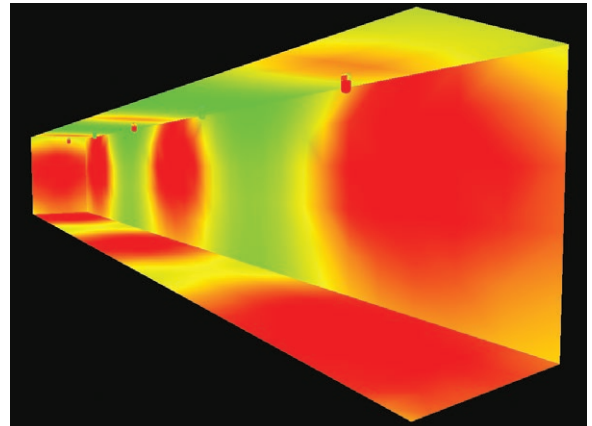





DIMENSIONS




Pendant Mount




Cone Mount

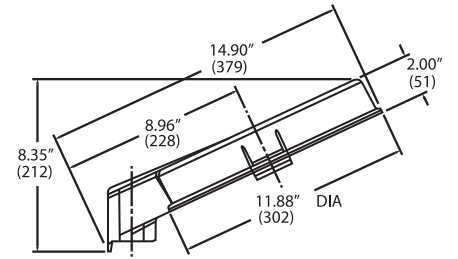


Stanchion(25°) Mount

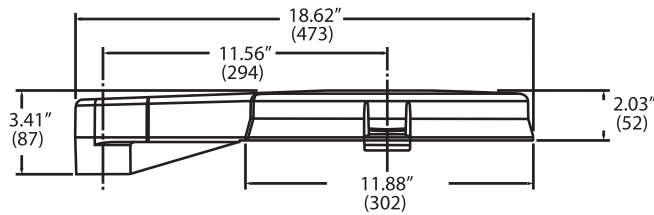


Stanchion(0°) Mount

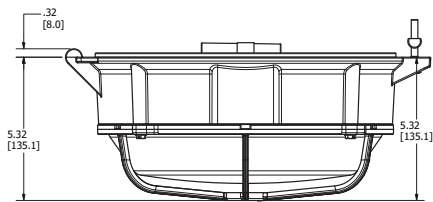


Size 1

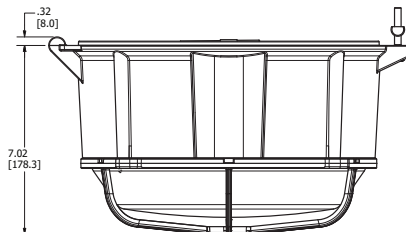


Size 2

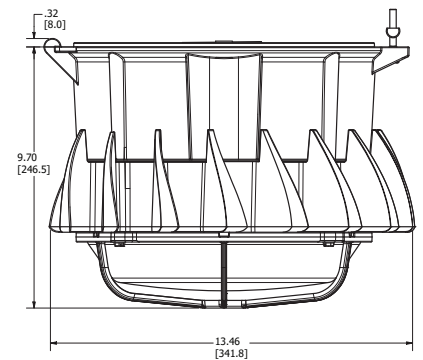


Size 3



Wall Bracket Mount

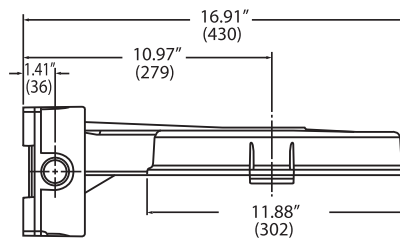

Ceiling Mount

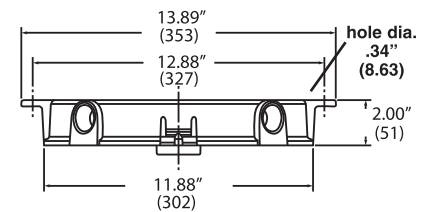



LIGHTING

VMLX SERIES

FIXTURE ADAPTERS


CERTiTE[®]V LED



VMCHVM-DEEP



VMCHVM

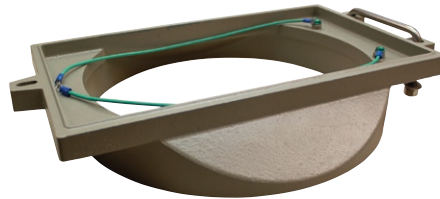

VMGEH2

Class I, Div. 2, Groups A, B, C, D
Class II, Div. 1, Groups E, F, G
Class III
Type 4X



FEATURES-SPECIFICATIONS

Applications



The Killark VM adapters are designed to ease upgrading of other manufacturer's fixtures to KILLARK LEDs where removal of existing mounting screws and conduit would be difficult and time consuming.

Adapters are used with the Killark VML-X fixture and the competitive splice box. The Killark fixtures, when used with the Killark adapters and appropriate competitive splice box, will maintain all hazardous and environmental ratings.

Features

- Fixture and competitive mount are certified together
- Baked powder epoxy/polyester finish, electrostatically applied to match the Killark VM tank
- All external hardware – Stainless Steel

VM SERIES COMPETATIVE ADAPTERS		
CATALOG NUMBER	DESCRIPTION	EXAMPLE OF MODEL UTILIZED OR REPLACED
VMCHVM	Tank adapter to Crouse-Hinds® VM Series mounts	VMV S2 C 050 R5
VMCHVM-DEEP	Tank adapter to CH (70's era wall mount with deep box)	VMV S2 TW 050 R5
VMM2LP	Tank adapter to Appleton® MERCMaster II mounts	LPCL 50 75 J
VMM3KP	Tank adapter to Appleton® MERCMaster III mounts	KPCL 50 75 J5 MT
VMHLDS	Tank adapter to Hazlux®3 mounts	DS015 H040-TGL-P2 E1 F
VMHPP2	Tank adapter mount to Holophane® Petrolux™	PETL 250HP 27 S25 CD
VMGEH2	Tank adapter H2 mount to GE® H2 Filtr-gard™	H2 4 05L 3C GG

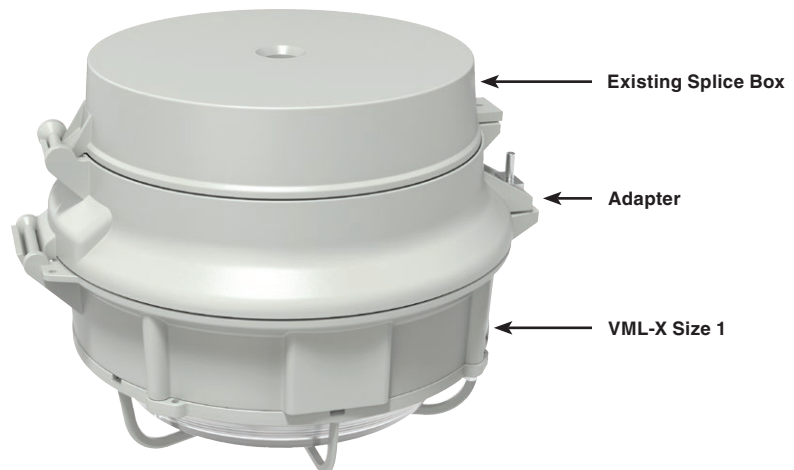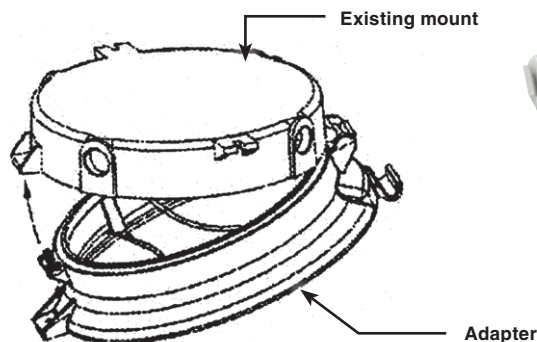



EXPLOSION-PROOF – INTRODUCTION & LOGIC

HOSTILE^{ITE} LED



Class I, Div. 1 & 2, Groups C,D
Class I, Zones 1 & 2, Groups IIB, IIA
Class II, Div. 1 & 2, Groups E,F,G
Class III, Div. 1 & 2
Suitable for wet locations
Suitable for Paint Spray Booth
Marine Rated (US only)
Type 3, 4, 4X
Factory Sealed



Certified - File LR11713

FEATURES-SPECIFICATIONS

Features

- Compact Explosion-proof with Traditional Industrial Appearance and Suitability
- Fluted; Dome or Angle Reflectors
- Optional Mounting arrangements including Pendant, Wall, Ceiling, and Stanchion
- EML LED Housings can be retrofitted to existing EZ splice boxes; upgrade from Incandescent, Fluorescent or HID
- Energy Savings – Less than 55 Watts of Power
- LED Array Life – 100,000+ hours with 70% initial lumens
- Long Fixture Life – 50,000 - 55,000 maintenance free hours
- Crisp White Light for Excellent Color Rendering – Chromaticity 5000K (CCT range; approx. 70 CRI)
- Instant on – Including after power interruption
- Solder-LESS LED Board Connections – Vibration Resistant
- Factory Sealed Construction – No external seal required, simply wire mounting cap and thread-in fixture to install
- **Warm LED color option available with 3070**

Materials

- Housing, splice box and guards corrosion resistant copper-free aluminum alloy
- Baked powder epoxy/polyester finish, electrostatically applied for complete, uniform corrosion protection
- All external hardware – Stainless Steel
- Reflectors are aluminum with white finish

Electrical Ratings

- Ambient suitability -40°C to 55°C
- “World Voltage” 120-277VAC 50/60Hz


Suitable for Paint Spray Booth Applications



LIGHTING

EML SERIES

EXPLOSION-PROOF – LOGIC, COMPONENTS, AND RATINGS

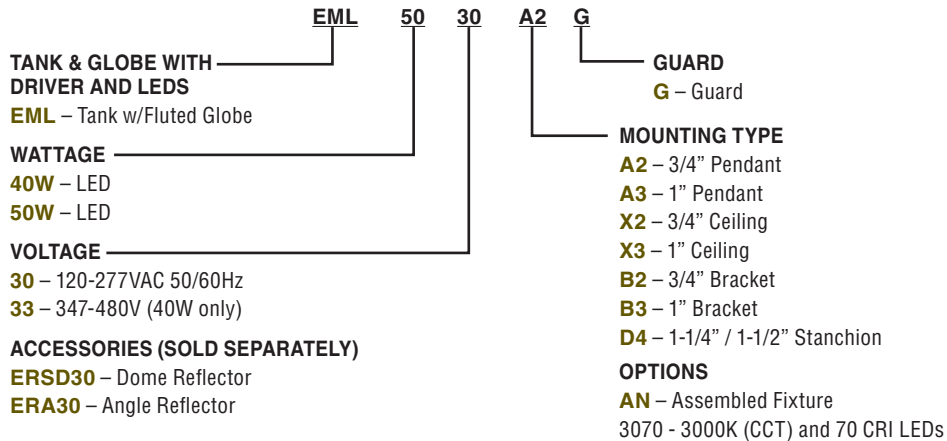

ORDERING INFORMATION AND AMBIENT SUITABILITY

CATALOG NO.	WEIGHT LBS./KG	WATTS	VOLTAGE	AMPS	EML FLUTED LUMENS	EMLC CLEAR LUMENS	C1D1/C1Z1		C2D1	
							40°C	55°C	40°C	55°C
EML4030	26.00 / 11.79	40	120-277VAC	0.46-0.16	3479	3750	T6	T6	T4A (EFG)	T4 (EFG)
EML4033			347-480VAC	0.14-0.10			T6	T6	T4A (EFG)	T4 (EFG)
EML5030		50	120-277VAC	0.43-0.18	5740	5741	T6	T6	T4A (EFG)	T4 (EFG)

TYPICAL WEIGHTS (LBS.) W/STANDARD GLOBE AND GUARD - EML (C) SERIES

Pendant 29.33

Ceiling 31.79

Wall 33.25

Stanchion 30.94



EZ MOUNTING BRACKETS

CATALOG NUMBER				HUB SIZE
PENDANT	CEILING	WALL	STANCHION	
EZA2	EZX2	EZB2	—	3/4"
EZA3	EZX3	EZB3	—	1"
—	—	—	EZD4*	1-1/4" / 1-1/2"*


* 1-1/2" furnished with 1-1/2" - 1-1/4" reducer




ERA30 Angle Dome

EML - EMLC LED ACCESSORIES	
DESCRIPTION	CATALOG NUMBER
Guard	EMG2
Dome Reflector	ERSD30
Angle Reflector	ERA30
CIDI C2D1 N4X Photocell 120VAC	VMHKPC1
CIDI C2D1 N4X Photocell 208-277VAC	VMHKPC2
Replacement Fluted Globe & Support	EMGS3
Replacement Clear Globe & Support	EMGS2
Adapter to old Killark "H" Series or Crouse Hinds®	EAC/EACH



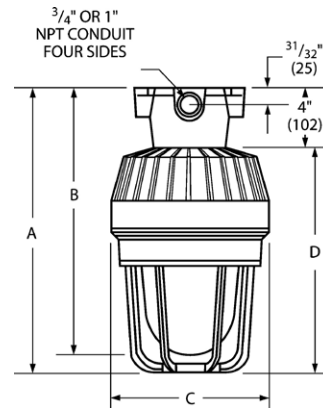

Ceiling

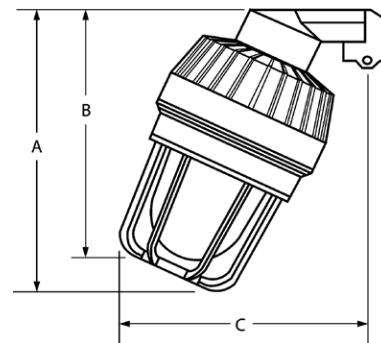

25° Stanchion

L33



LIGHTING

EZL SERIES

EXPLOSION-PROOF – INTRODUCTION & LOGIC

HOSTILE^{ELITE} LED



Class I, Div. 1 & 2, Groups C,D
Class I, Zones 1 & 2, Groups IIB, IIA
Class II, Div. 1 & 2, Groups E,F,G
Class III, Div. 1 & 2
Suitable for wet locations
Suitable for Paint Spray Booth
Marine Rated (US only)
Type 3, 4, 4X
Factory Sealed

 Certified - File LR11713

FEATURES-SPECIFICATIONS

Features

- Explosion-proof with Traditional Industrial Appearance and Suitability
- Mounting choice – Pendant, ceiling, 25° stanchion or 90° wall mount, all with “wireless” design that allows fast, easy fixture installation or removal for maintenance.
- Accessories – Available with or without guard, standard dome or angle reflector
- EZL LED Housings can be retrofitted to existing EZ splice boxes; upgrade from Incandescent, Fluorescent or HID
- Energy Savings – Less than 130 Watts of Power
- LED Array Life – 100,000+ hours with 70% initial lumens
- Long Fixture Life – 50,000 - 55,000 maintenance free hours
- Crisp White Light for Excellent Color Rendering – Chromaticity 5000K (CCT range; approx. 70 CRI)
- Instant on – Including after power interruption
- Solder-LESS LED Board Connections – Vibration Resistant
- Factory Sealed Construction – No external seal required, simply wire mounting cap and thread-in fixture to install
- **Warm LED color option available with 3070**


Materials

- Housing, splice box, and guards corrosion resistant copper-free aluminum alloy
- Baked powder epoxy/polyester finish, electorstatically applied for complete, uniform corrosion protection
- All external hardware – Stainless Steel
- Reflectors are aluminum with white finish

Electrical Ratings

- Ambient suitability -40°C to 55°C
- “World Voltage” 120-277VAC 50/60Hz

CATALOG NUMBER LOGIC

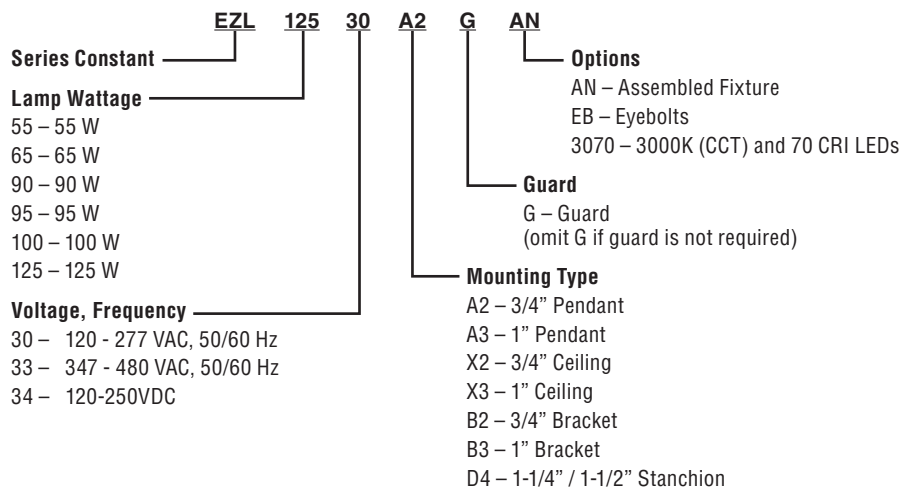



EXPLOSION PROOF – ORDERING INFORMATION, COMPONENTS & RATINGS



ORDERING INFORMATION AND AMBIENT SUITABILITY

CATALOG NO.	WEIGHT LBS./KG	WATTS	VOLTAGE	AMPS	DELIVERED LUMENS	C1D1/C1Z1		C2D1	
						40°C	55°C	40°C	55°C
EZL5530	36 / 16.33	55	120-277VAC	0.46/0.20	5596	T6	T6	EFG	EFG
EZL6530		65	120-277VAC	0.54/0.23	6515	T6	T6	EFG	EFG
EZL9030		90	120-277VAC	0.75/0.32	7818	T6	T6	EFG	EFG
EZL9530		95	120-277VAC	0.79/0.34	9121	T6	T6	EFG	EFG
EZL10030		100	120-277VAC	0.83/0.36	10903	T6	XXX	EFG	XXX
EZL12530		125	120-277VAC	1.04/0.45	12720	T6	XXX	EFG	XXX

MOUNTING BOXES

HUB SIZE	CATALOG NUMBER			
	PENDANT	CEILING	BRACKET	STANCHION
3/4"	EZA2	EZX2	EZB2	—
1"	EZA3	EZX3	EZB3	—
1-1/4"/1-1/2"	—	—	—	EZD4



REFLECTORS

CATALOG NUMBER	DESCRIPTION
VMPSD40	Standard dome. fiberglass reinforced polyester
VMPA40	30° Angle fiberglass reinforced polyester
HRD400	Deep dome. Aluminum with white finish
HRD400ALZ	Deep dome with specular anodized finish







LIGHTING EZ SERIES

DIMENSIONS


Pendant

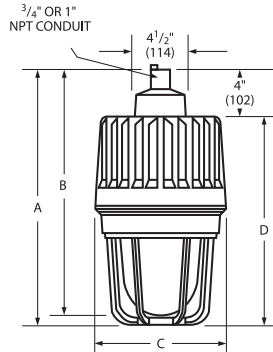





Ceiling



Wall Bracket

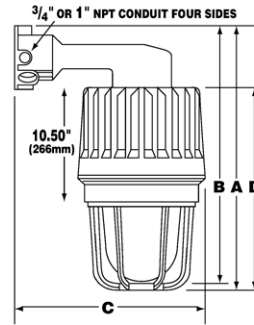

25° Stanchion




MOUNTING DIMENSIONS


MOUNTING DIMENSIONS														
PENDANT				CEILING				BRACKET				STANCHION		
A	B	C	D	A	B	C	D	A	B	C	D	A	B	C
22" (558)	21-1/4" (539)	11-1/4" (285)	18" (457)	22" (558)	21-1/4" (539)	11-1/4" (285)	18" (457)	22-7/8" (580)	22-1/8" (561)	16-3/4" (425)	18" (457)	24-7/8" (631)	24" (609)	19-13/16" (503)

Reflector Dimensions


Standard Dome

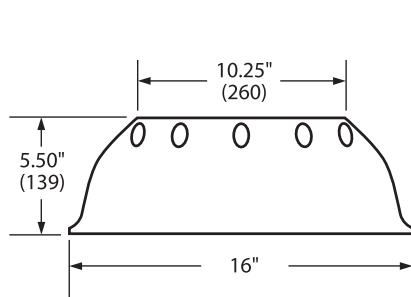

Angle

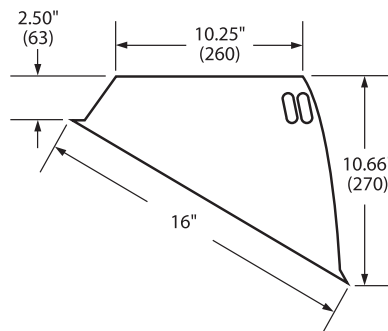

Deep Dome

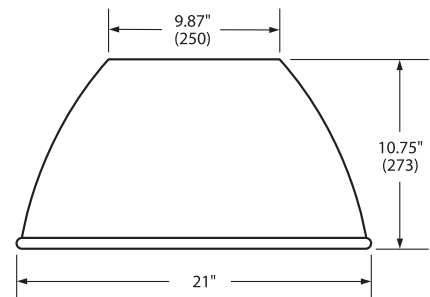



FIXTURE ADAPTERS

HOSTILE^{ITE} LED



Class I, Div. 1 & 2, Group D
Class I, Zones 1 & 2, Groups IIA
Class II, Div. 1 & 2, Groups E,F,G
Class III

US Certified E10514

FEATURES-SPECIFICATIONS

Features

- Setscrews permit secure adapter attachment into old mounting box and to new fixture
- Converted fixtures may be easily removed for service using the Killark EZ mounting system. Wire terminals are included in the adapter (EZTB Terminal Block)

EAC / EZBA FIXTURE ADAPTERS		
CATALOG NUMBER	DESCRIPTION	EXAMPLE OF MODEL UTILIZED OR REPLACED
EAC	Killark H series Ceiling or Wall	HXG-2-125 Fixture
EACH12	Crouse old style Ceiling Mount with lamp socket in adapter ring between fixture body and a GUF 12 pitch box	GUF box w/Set Screw
EZBA12	Crouse old style Wall Mount, old style Arm with integral lamp socket (socket in fixture in newer models) attached to GUF 12 pitch mounting box. EZBA12 includes arm	GUF box w/Set Screw
EACH16	Crouse newer style ceiling or wall fixtures w/lamp socket in fixture body; mounted to EV series 16 pitch threaded box; adapter fits in ceiling box or existing arm attached to wall fixture	EVA26/EV22 Box; EVBX240
EAAP-C2	Appleton Code-Master 2	CLC5075

