



WALLPACK

CERTILITE®



Class I, Div. 2, Groups A,B,C,D
Class I, Zone 2, Groups IIC, IIB, IIA
Type 4X

 Certified


 cCSAus File No: LR11713

FEATURES-SPECIFICATIONS

Features

- Aluminum with Bronze finish ½" hub on either side for conduit entry
- Suitability for 55°C ambient, 90°C supply wire required (see table)
- Lens thermal shock and impact resistant prismatic borosilicate glass
- Two Hubbell Guard® Corrosion resistant hex head fasteners provide water-tight seal for door gasket
- Options include: factory installed photo cells, fusing

CATALOG LOGIC

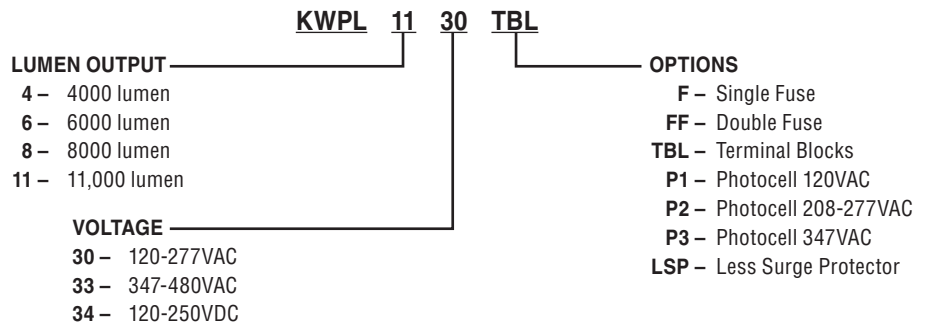



LIGHTING KWPL SERIES


WALLPACK



Glare Shield




Clear Shield



Wire Guard

ORDERING INFORMATION

ORDERING INFORMATION AND AMBIENT SUITABILITY						C1D2	
CATALOG NO.	WEIGHT LBS./KG	WATTS	VOLTAGE	AMPS	LUMENS	40°C	55°C
KWPL430	14.00 / 6.35	34	120-277VAC	0.12 - 0.28	4436	T5	T4A
KWPL433			347-480VAC	0.07 - 0.10		T5	T4A
KWPL434			120-250VDC	0.14 - 0.28		T5	T4A
KWPL630		46	120-277VAC	0.17 - 0.38	5636	T4A	T4
KWPL633			347-480VAC	0.10 - 0.13			
KWPL634			120-250VDC	0.18 - 0.38			
KWPL830		68	120-277VAC	0.25 - 0.57	8404	T4A	T4
KWPL833			347-480VAC	0.14 - 0.20			
KWPL834			120-250VDC	0.27 - 0.57			
KWPL1130		90	120-277VAC	0.32 - 0.75	10914	T4	—
KWPL1133			347-480VAC	0.19 - 0.26			
KWPL1134			120-250VDC	0.36 - 0.75			

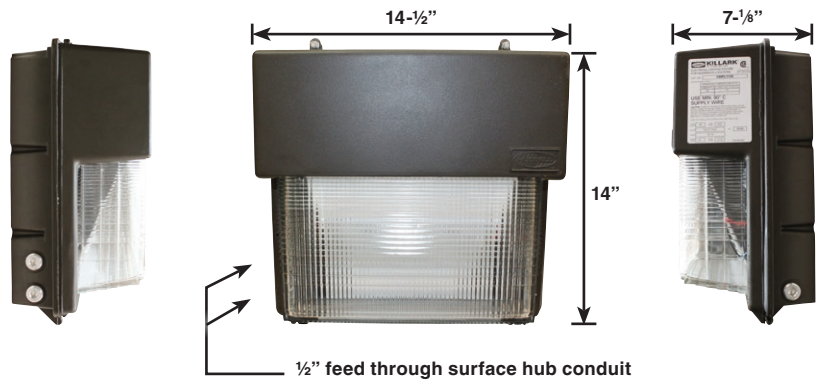

CS
C US
FACTORY
SEALED

Photo Cell Field Kits for Harsh Type 4X and Class I, Div. 2 Locations

PHOTO CELL FIELD KITS	
CATALOG NUMBER	VOLTS
VMFSPC1	120VAC
VMFSPC2	208-277VAC
VMFSPC3	347VAC

KWP ACCESSORIES	
CATALOG NUMBER	DESCRIPTION
PGPS	Clear Shield (Polycarbonate) for Protecting Lens
PGWG	Wire Guard, Cadmium Plated Steel
PVLV	Glare Shield Full Cutoff Visor – Formed Bronze Aluminum Forces light to Walkway
KWPLENS	Replacement Door and Lens